

SOME ADVENTURES IN LEARNING SYNTHESIS OF MATHEMATICAL OBJECTS AND PROOFS

Josef Urban

Czech Technical University in Prague

Conference on Theoretical and Computational Algebra
July 2 – 7, 2023, Pocinho



Outline

- A brief intro to what I normally do:
- ... learning theorem proving over large formal mathematical corpora
- Discussion of where we are in AI/TP and what is needed
- Main topic: Learning-based discovery of programs for integer sequences
- Perhaps some more discussion

Brief Intro to What I Normally Do: ML+ATP for Math

- What is mathematical and scientific thinking?
- Pattern-matching, analogy, induction/learning from examples
- Deductive reasoning and proving
- Complicated feedback loops between learning and deduction
- Using a lot of previous knowledge - both for induction and deduction

- We need to develop such methods on computers
- Are there any large corpora suitable for nontrivial deduction?
- Yes! Large libraries of formal proofs and theories
- So let's try to develop strong AI on them!


ENIGMA: Feedback prove/learn loop on formal math

- Done on 57880 Mizar Mathematical Library problems recently
- Efficient **ML-guidance inside the best ATPs** (E prover and more)
- Training of the ML-guidance is *interleaved* with proving harder problems
- Ultimately a **70% improvement** over the original strategy:
- ... from 14933 proofs to 25397 proofs (all 10s CPU - no cheating)
- **75% of the Mizar corpus** reached in July 2021 - higher times and many runs: https://github.com/ai4reason/ATP_Proofs
- Details in our Mizar60 paper: <https://arxiv.org/abs/2303.06686>

	S	$S \odot M_9^0$	$S \oplus M_9^0$	$S \odot M_9^1$	$S \oplus M_9^1$	$S \odot M_9^2$	$S \oplus M_9^2$	$S \odot M_9^3$	$S \oplus M_9^3$
solved	14933	16574	20366	21564	22839	22413	23467	22910	23753
$S\%$	+0%	+10.5%	+35.8%	+43.8%	+52.3%	+49.4%	+56.5%	+52.8%	+58.4
$S+$	+0	+4364	+6215	+7774	+8414	+8407	+8964	+8822	+9274
$S-$	-0	-2723	-782	-1143	-508	-927	-430	-845	-454

	$S \odot M_{12}^3$	$S \oplus M_{12}^3$	$S \odot M_{16}^3$	$S \oplus M_{16}^3$
solved	24159	24701	25100	25397
$S\%$	+61.1%	+64.8%	+68.0%	+70.0%
$S+$	+9761	+10063	+10476	+10647
$S-$	-535	-295	-309	-183

Can you do this in 4 minutes?

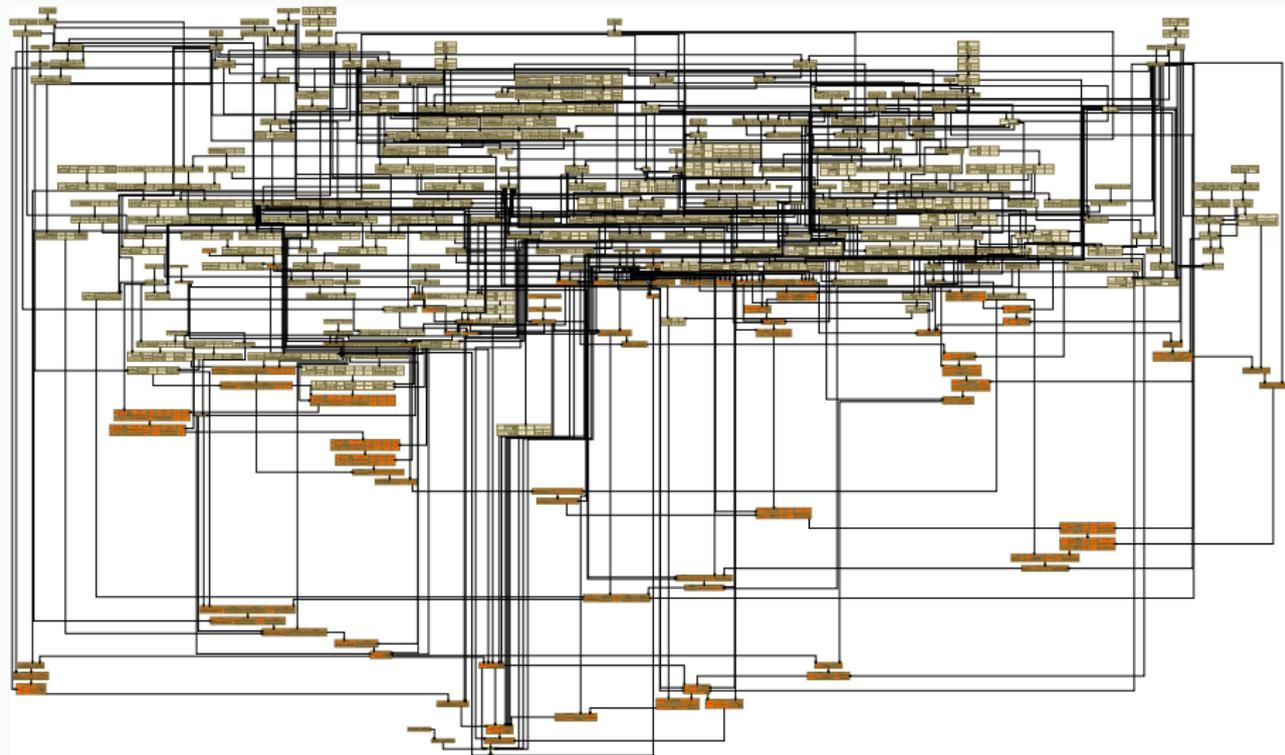

Can you do this in 4 minutes?

```
theorem 7h31: BORSUK 5:31
  For A being Subset of  $\mathbb{R}^1$ 
  for a, b being real number st a < b & A = RAT (a,b) holds
  Cl A = [.a,b.]
proof
  let A be Subset of  $\mathbb{R}^1$ ; :: thesis:
  let a, b be real number ; :: thesis:
  assume that
  A1: a < b and
  A2: A = RAT (a,b) ; :: thesis:
  reconsider ab = [.a,b.], RT = RAT as Subset of  $\mathbb{R}^1$  by NUMBERS:12, TOPMETR:17;
  reconsider RR = RAT /\ [.a,b.] as Subset of  $\mathbb{R}^1$  by TOPMETR:17;
  A3: the carrier of  $\mathbb{R}^1 \setminus$  (Cl ab) = Cl ab by XBOOLE_1:20;
  A4: Cl RR c= (Cl RT) /\ (Cl ab) by HME_TOPM:11;
  thus Cl A c= [.a,b.] :: according to XBOOLE_0:def 10 :: thesis:
proof
  let x be set ; :: according to TARSKI:def 3 :: thesis:
  assume x in Cl A ; :: thesis:
  then x in (Cl RT) /\ (Cl ab) by A2, A4;
  then x in the carrier of  $\mathbb{R}^1 \setminus$  (Cl ab) by A3;
  hence x in [.a,b.] by A1, A3, A4; :: thesis:
end;
thus [.a,b.] c= Cl A :: thesis:
proof
  let x be set ; :: according to TARSKI:def 3 :: thesis:
  assume A5: x in [.a,b.] ; :: thesis:
  then reconsider p = x as Element of RealSpace by METRIC_1:def 13;
  A6: p <= p by A5, XREAL_1:1;
  A7: p <= b by A5, XREAL_1:1;
  per cases by A7, XREAL_0:11
  suppose AB: p < b ; :: thesis:
  now :: thesis:
  let r be real number ; :: thesis:
  reconsider pp = p + r as Element of RealSpace by METRIC_1:def 13, XREAL_0:def 1;
  set pr = min (pp,((p + b) / 2));
  A9: min (pp,((p + b) / 2)) <= (p + b) / 2 by XREAL_0:17;
  assume A10: r > 0 ; :: thesis:
  p < min (pp,((p + b) / 2))
  proof
  per cases by XREAL_0:15
  suppose min (pp,((p + b) / 2)) = pp ; :: thesis:
  hence p < min (pp,((p + b) / 2)) by A10, XREAL_1:291; :: thesis:
  end;
  suppose min (pp,((p + b) / 2)) = (p + b) / 2 ; :: thesis:
  hence p < min (pp,((p + b) / 2)) by A6, XREAL_1:226; :: thesis:
  end;
end;
end;
then consider Q being rational number such that
A11: p < Q and
A12: Q < min (pp,((p + b) / 2)) by RAT_1:7;
(p + b) / 2 < b by A6, XREAL_1:226;
then min (pp,((p + b) / 2)) < b by A9, XREAL_0:2;
then A13: Q < b by A12, XREAL_0:2;
min (pp,((p + b) / 2)) <= pp by XREAL_0:17;
then A14: (min (pp,((p + b) / 2))) - p <= pp - p by XREAL_1:9;
reconsider P = Q as Element of RealSpace by METRIC_1:def 13, XREAL_0:def 1;
P - p < (min (pp,((p + b) / 2))) - p by A12, XREAL_1:9;
then P - p < r by A14, XREAL_0:2;
then dist (p,P) < r by A11, A14;
then A15: P in Ball (p,r) by METRIC_1:11;
a < Q by A6, A11, XREAL_0:2;
then A16: Q in [.a,b.] by A13, XREAL_1:4;
Q in RAT by RAT_1:def 2;
then Q in A by A2, A16, XBOOLE_0:def 4;
hence Ball (p,r) meets A by A15, XBOOLE_0:13; :: thesis:
end;
hence x in Cl A by GOBOARD6:92, TOPMETR:61; :: thesis:
```

Can you do this in 4 minutes?

☰ README.md 

Topology - the closure of rationals on (a,b) is [a,b]

359-long proof in 234s using 3-phase ENIGMA, shifting context and aggressive subsumption.

for A being Subset of \mathbb{R}^1 for a, b being real number st $a < b$ & $A = \text{RAT}(a,b)$ holds $\text{CI } A = [a,b]$

The Mizar proof takes 80 lines:

http://grid01.ciirc.cvut.cz/~mptp/7.13.01_4.181.1147/html/borsuk_5.html#T31

E proof (3-phase parental+lgb+gmn-server plus shifting context plus aggr subsumption) using 38 of the 101 heuristically selected premises (subproblem minimization):

http://grid01.ciirc.cvut.cz/~mptp/enigma_prf/t31_borsuk_5

/local1/mptp/parents/out2/2pb3l8-query1024-ctx1536-w0-coop-srv-local1-f1711-jj1-zar-parents_nothr_gnm2_solo1_0.05_0.005_0.1_fw.minsub65all_240s_fw/t31_borsuk_5

```
# Proof object clause steps           : 359
# Proof object initial clauses used   : 56
# Proof object initial formulas used  : 38
# Proof object simplifying inferences : 180
# Parsed axioms                       : 101
# Initial clauses in saturation       : 153
# Processed clauses                   : 7274
# ...remaining for further processing : 4883
# Generated clauses                   : 438702
# ...frozen by parental guidance     : 133869
# ..aggressively subsumed            : 83871
# User time                           : 234.274 s
```

What Are the Current AI/TP TODOs/Bottlenecks?

- High-level structuring of proofs - proposing **good lemmas**
- Proposing **new concepts, definitions and theories**
- Proposing new **targeted algorithms**, decision procedures, tactics
- Proposing good **witnesses** for existential proofs
- All these problems involve **synthesis of some mathematical objects**
- Btw., constructing proofs is also a synthesis task
- This talk: explore **learning-guided synthesis for OEIS**
- Interesting research topic and tradeoff in learning/AI/proving:
- Learning **direct guessing of objects** (this talk) vs **guidance for search procedures** (ENIGMA and friends)
- Start looking also at **semantics rather than just syntax** of the objects

Quotes: Learning vs. Reasoning vs. Guessing

“C’est par la logique qu’on démontre, c’est par l’intuition qu’on invente.”

(It is by logic that we prove, but by intuition that we discover.)

– Henri Poincaré, *Mathematical Definitions and Education*.

“Hypothesen sind Netze; nur der fängt, wer auswirft.”

(Hypotheses are nets: only he who casts will catch.)

– Novalis, quoted by Popper – *The Logic of Scientific Discovery*

Certainly, let us learn proving, but also let us learn guessing.

– G. Polya - *Mathematics and Plausible Reasoning*

*Galileo once said, "Mathematics is the language of Science." Hence, facing the same laws of the physical world, **alien mathematics** must have a good deal of similarity to ours.*

– R. Hamming - *Mathematics on a Distant Planet*

QSynt: Semantics-Aware Synthesis of Math Objects



- Gauthier (et al) 2019-23
- Synthesize math expressions based on **semantic** characterizations
- i.e., not just on the **syntactic** descriptions (e.g. proof situations)
- **Tree Neural Nets** and **Monte Carlo Tree Search**
- Recently also various (small) **language models** with their search methods
- **Invention of programs for OEIS sequences from scratch**
- **100k** OEIS sequences (out of 350k) solved so far:
<https://www.youtube.com/watch?v=24oejR9wsXs>,
<http://grid01.ciirc.cvut.cz/~thibault/qsynt.html>
- Millions of conjectures invented: **20+ different characterizations of primes**
- Non-neural (Turing complete) computing and **semantics collaborates with the statistical/neural learning**

OEIS: \geq 350000 finite sequences

The OEIS is supported by [the many generous donors to the OEIS Foundation](#).

0 1 3 6 2 7
: 13
: OE 20
23 IS 12
10 22 11 21

THE ON-LINE ENCYCLOPEDIA OF INTEGER SEQUENCES[®]

founded in 1964 by N. J. A. Sloane

 [Hints](#)

(Greetings from [The On-Line Encyclopedia of Integer Sequences!](#))

Search: **seq:2,3,5,7,11**

Displaying 1-10 of 1163 results found.

page 1 [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) ... [117](#)

Sort: relevance | [references](#) | [number](#) | [modified](#) | [created](#)

Format: long | [short](#) | [data](#)

[A000040](#)

The prime numbers.

(Formerly M0652 N0241)

+30
10150

2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41, 43, 47, 53, 59, 61, 67, 71, 73, 79, 83, 89, 97, 101, 103, 107, 109, 113, 127, 131, 137, 139, 149, 151, 157, 163, 167, 173, 179, 181, 191, 193, 197, 199, 211, 223, 227, 229, 233, 239, 241, 251, 257, 263, 269, 271 ([list](#); [graph](#); [refs](#); [listen](#); [history](#); [text](#); [internal format](#))

OFFSET 1,1

COMMENTS See [A065091](#) for comments, formulas etc. concerning only odd primes. For all information concerning prime powers, see [A000961](#). For contributions concerning "almost primes" see [A002808](#).

A number p is prime if (and only if) it is greater than 1 and has no positive divisors except 1 and p .

A natural number is prime if and only if it has exactly two (positive) divisors.

A prime has exactly one proper positive divisor, 1.

Generating programs for OEIS sequences

0, 1, 3, 6, 10, 15, 21, ...

An **undesirable large program**:

```
if x = 0 then 0 else
if x = 1 then 1 else
if x = 2 then 3 else
if x = 3 then 6 else ...
```

Small program (Occam's Razor):

$$\sum_{i=1}^n i$$

Fast program (efficiency criteria):

$$\frac{n \times n + n}{2}$$

Programming language

- Constants: 0, 1, 2
- Variables: x, y
- Arithmetic: $+, -, \times, \text{div}, \text{mod}$
- Condition : if $\dots \leq 0$ then \dots else \dots
- $\text{loop}(f, a, b) := u_a$ where $u_0 = b$,

$$u_n = f(u_{n-1}, n)$$

- Two other loop constructs: loop2 , a while loop

Example:

$$2^x = \prod_{y=1}^x 2 = \text{loop}(2 \times x, \mathbf{x}, 1)$$

$$\mathbf{x}! = \prod_{y=1}^x y = \text{loop}(y \times x, \mathbf{x}, 1)$$

QSynt: synthesizing the programs/expressions

- **Inductively defined** set P of our *programs and subprograms*,
- and an auxiliary set F of binary functions (higher-order arguments)
- are the smallest sets such that $0, 1, 2, x, y \in P$, and if $a, b, c \in P$ and $f, g \in F$ then:

$$a + b, a - b, a \times b, a \text{ div } b, a \text{ mod } b, \text{cond}(a, b, c) \in P$$

$$\lambda(x, y).a \in F, \text{loop}(f, a, b), \text{loop2}(f, g, a, b, c), \text{compr}(f, a) \in P$$


- Programs are built in **reverse polish notation**
- Start from an empty stack
- Use ML to **repeatedly choose the next operator to push on top of a stack**
- Example: Factorial is $\text{loop}(\lambda(x, y). x \times y, x, 1)$, built by:

$$[] \rightarrow_x [x] \rightarrow_y [x, y] \rightarrow_{\times} [x \times y] \rightarrow_x [x \times y, x]$$

$$\rightarrow_1 [x \times y, x, 1] \rightarrow_{\text{loop}} [\text{loop}(\lambda(x, y). x \times y, x, 1)]$$


QSynt: Training of the Neural Net Guiding the Search

- The triple $((\text{head}([x \times y, x], [1, 1, 2, 6, 24, 120 \dots]), \rightarrow_1)$ is a training example extracted from the program for factorial $\text{loop}(\lambda(x, y). x \times y, x, 1)$
- \rightarrow_1 is the action (adding 1 to the stack) required on $[x \times y, x]$ to progress towards the construction of $\text{loop}(\lambda(x, y). x \times y, x, 1)$.

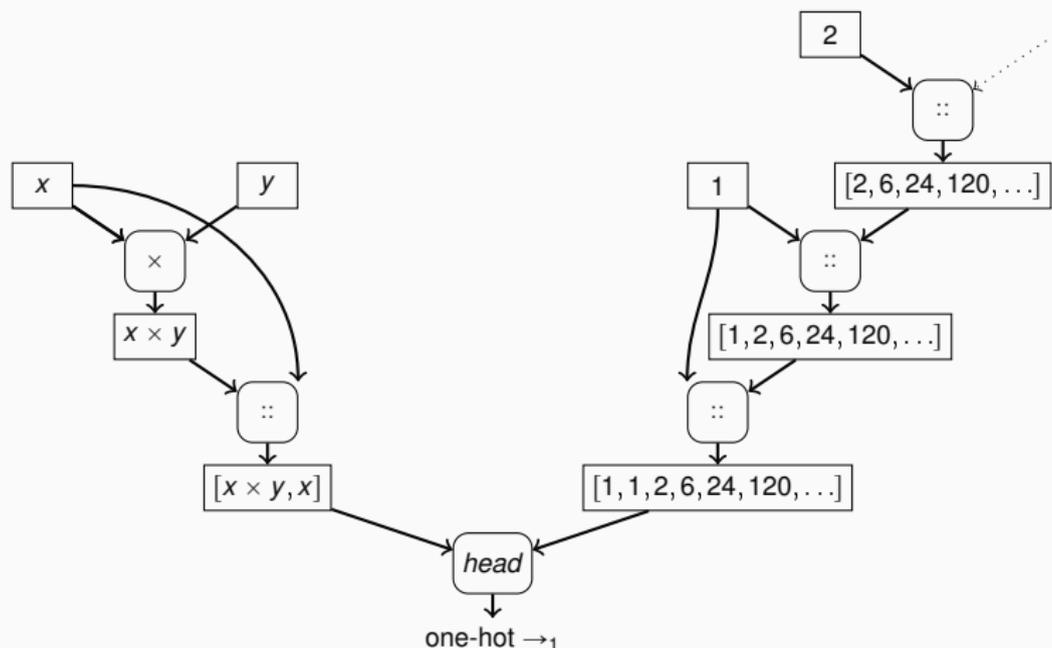

QSynt program search - Monte Carlo search tree

7 iterations of the tree search gradually extending the search tree. The set of the synthesized programs after the 7th iteration is $\{1, x, y, x \times y, x \bmod y\}$.

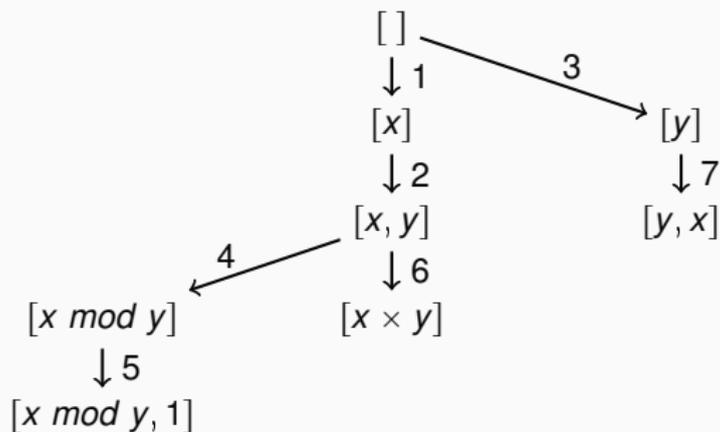


Using Language Models for Math Tasks


- **Recurrent neural networks** (RNNs) with attention (NMT)
- **Transformers** (BERT, GPT)
- Applied recently to symbolic/mathematical tasks:
 - ... rewriting, conjecturing, translation from informal to formal
 - Formulated as **sequence-to-sequence** translation tasks
 - **Efficient** training and inference on GPUs, many toolkits
 - Can get **expensive** for large LMs (LLMs) (\$5M for GPT-3)
 - We use small models on old HW, our total energy bill is **below \$1000**

Encoding OEIS for Language Models

- Input sequence is a **series of digits**
- Separated by an additional token # at the integer boundaries
- Output program is a **sequence of tokens** in Polish notation
- Parsed by us to a syntax tree and **translatable to Python**
- Example: $a(n) = n!$

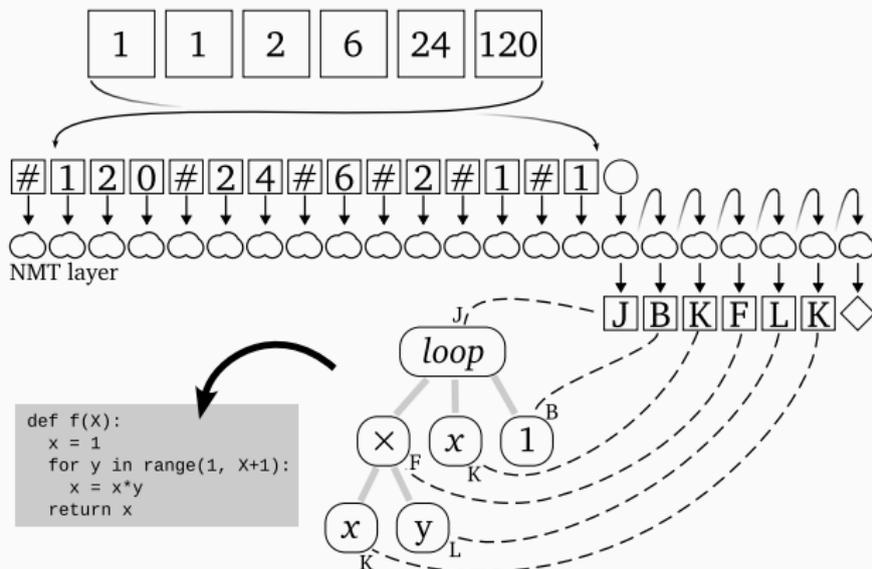

Search-Verify-Train Feedback Loop

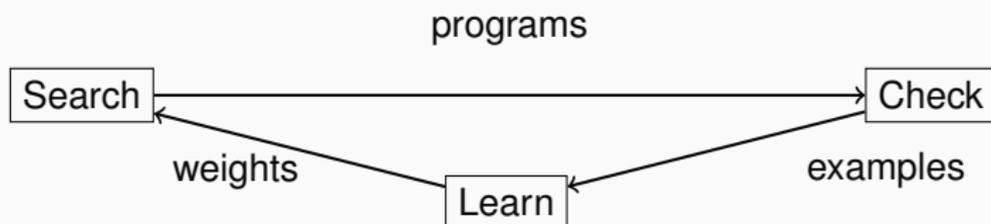

Analogous to our Prove/Learn feedback loops in learning-guided proving (since 2006)


Search-Verify-Train Feedback Loop for OEIS

- **search phase:** LM synthesizes many programs for input sequences
- typically 240 candidate programs for each input using **beam search**
- **84M programs** for OEIS in several hours on the GPU (depends on model)
- **checking phase:** the millions of programs **efficiently evaluated**
- resource limits used, **fast indexing** structures for OEIS sequences
- check if the program generates *any* OEIS sequence (**hindsight replay**)
- we keep the **shortest** (Occam's razor) and **fastest** program (efficiency)
- **learning phase:** LM **trains to translate** the “solved” OEIS sequences into the best program(s) generating them

Search-Verify-Train Feedback Loop

- The weights of the LM either trained from **scratch** or **continuously updated**
- This yields *new minds vs seasoned experts* (who have seen it all)
- We also train experts on varied selections of data, in varied ways
- **Orthogonality**: common in theorem proving - different experts help
- Each iteration of the self-learning loop discovers **more solutions**
- ... also **improves/optimizes existing solutions**
- The **alien mathematician** thus self-evolves
- Occam's razor and efficiency are used for its **weak supervision**
- Quite different from today's LLM approaches:
- LLMs do **one-time** training on everything human-invented
- Our alien instead **starts from zero knowledge**
- Evolves increasingly nontrivial skills, may **diverge from humans**
- **Turing complete** (unlike Go/Chess) – arbitrary complex algorithms

QSynt web interface for program invention

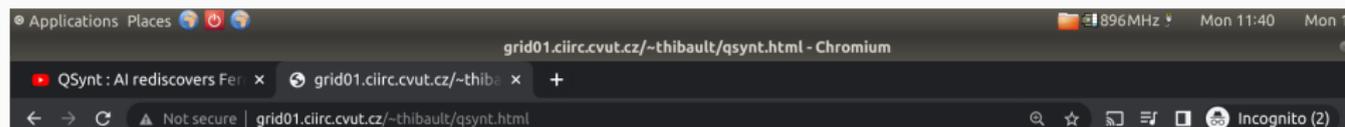

QSynt: Program Synthesis for Integer Sequences

Propose a sequence of integers:

Timeout (maximum 300s)

Generated integers (maximum 100)

A few sequences you can try:

0 1 1 0 1 0 1 0 0 0 1 0 1 0 0 0 1 0 1

0 1 4 9 16 21 25 28 36 37 49

0 1 3 6 10 15

2 3 5 7 11 13 17 19 23 29 31 37 41 43

1 1 2 6 24 120

2 4 16 256

QSynt inventing Fermat pseudoprimes

Positive integers k such that $2^k \equiv 2 \pmod k$. (341 = 11 * 31 is the first non-prime)

First 16 generated numbers (f(0),f(1),f(2),...):

2 3 5 7 11 13 17 19 23 29 31 37 41 43 47 53

Generated sequence matches best with: [A15919](#)(1-75), [A100726](#)(0-59), [A40](#)(0-58)

Program found in 5.81 seconds

$f(x) := 2 + \text{compr}(\backslash x.\text{loop}(\backslash(x,i).2*x + 2, x, 2) \text{ mod } (x + 2), x)$

Run the equivalent Python program [here](#) or in the window below:

The screenshot shows the Brython web interface. At the top, the 'Brython' logo is displayed. Below it are navigation links: 'Tutorial', 'Demo', 'Documentation', 'Console', 'Editor', 'Gallery', and 'Resources'. On the right side, there is a language selector set to 'English'. The main content area is divided into two parts. On the left, there is a code editor with the following Python code:

```
1 def f2(X):
2     x = 2
3     for i in range (1,X + 1):
4         x = 2*x + 2
5     return x
6
7 def f1(X):
8     x,i = 0,0
9     while i <= X:
10        if f2(x) % (x + 2) <= 0:
11            i = i + 1
12            x = x + 1
13        return x - 1
14
15 def f0(X):
16     return 2 + f1(X)
17
18 for x in range(32):
19     print (f0(x))
20
```

On the right, there is a console window with the following output:

```
2
3
5
7
11
13
17
19
23
29
31
37
41
43
47
53
59
61
67
```

At the top of the console window, there are buttons for 'run', 'Python', 'Javascript', and 'Share code'.

Lucas/Fibonacci characterization of (pseudo)primes

input sequence: 2,3,5,7,11,13,17,19,23,29

invented output program:

```
f(x) := compr(\(x,y).(loop2(\(x,y).x + y, \(x,y).x, x, 1, 2) - 1)
          mod (1 + x), x + 1) + 1
```

human conjecture: x is prime iff? x divides (Lucas(x) - 1)

PARI program:

```
? lucas(n) = fibonacci(n+1)+fibonacci(n-1)
? b(n) = (lucas(n) - 1) % n
```

Counterexamples (Bruckman-Lucas pseudoprimes):

```
? for(n=1,4000,if(b(n)==0,if(isprime(n),0,print(n))))
```

1

705

2465

2737

3745

QSynt inventing primes using Wilson's theorem

n is prime iff $(n - 1)! + 1$ is divisible by n (i.e.: $(n - 1)! \equiv -1 \pmod n$)

First 32 generated numbers ($f(0), f(1), f(2), \dots$):


0 1 1 0 1 0 1 0 0 0 1 0 1 0 0 0 1 0 1 0 0 0 1 0 1 0 0 0 0 0 1 0 1 0

Generated sequence matches best with: [A10051](#)(0-100), [A252233](#)(0-29), [A283991](#)(0-24)

Program found in 5.17 seconds

$f(x) := (\text{loop}(\backslash(x,i).x * i, x, x) \bmod (x + 1)) \bmod 2$

Run the equivalent Python program [here](#) or in the window below:

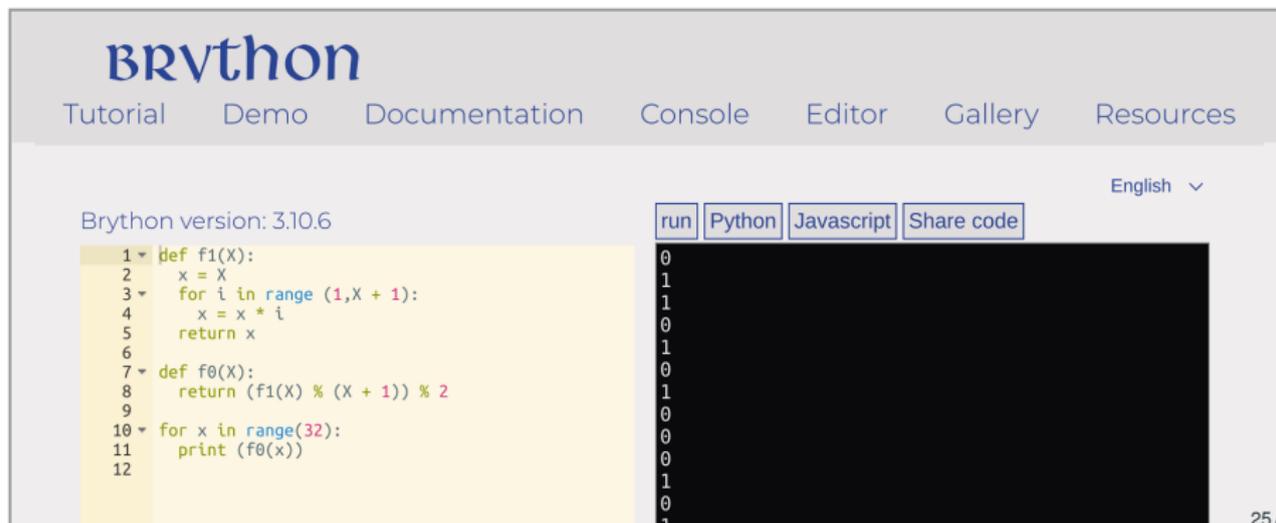

The screenshot shows the Brython web interface. At the top, the logo "Brython" is displayed in blue. Below it are navigation links: "Tutorial", "Demo", "Documentation", "Console", "Editor", "Gallery", and "Resources". On the right side, there is a language selector set to "English" with a dropdown arrow. Below the navigation, the text "Brython version: 3.10.6" is shown. The main area is divided into two panels. The left panel contains Python code for a function $f_0(x)$ that generates a sequence of 0s and 1s based on Wilson's theorem. The right panel shows the output of the program, which is a vertical list of 32 numbers: 0, 1, 1, 0, 1, 0, 0, 0, 1, 0, 1, 0, 0, 0, 1, 0, 1, 0, 0, 0, 1, 0, 1, 0, 0, 0, 0, 0, 1, 0, 1, 0.

```
def f1(X):
    x = X
    for i in range(1, X + 1):
        x = x * i
    return x


def f0(X):
    return (f1(X) % (X + 1)) % 2

for x in range(32):
    print (f0(x))
```

0
1
1
0
1
0
0
0
1
0
1
0
0
0
1
0
1
0
0
0
1
0
1
0
0
0
0
0
1
0
1
0

Introducing Local Macros/Definitions


A macro/expanded version of a program invented for A1813: $a(n) = (2n)!/n!$.
1, 2, 12, 120, 1680, 30240, 665280, 17297280, 518918400, 17643225600,

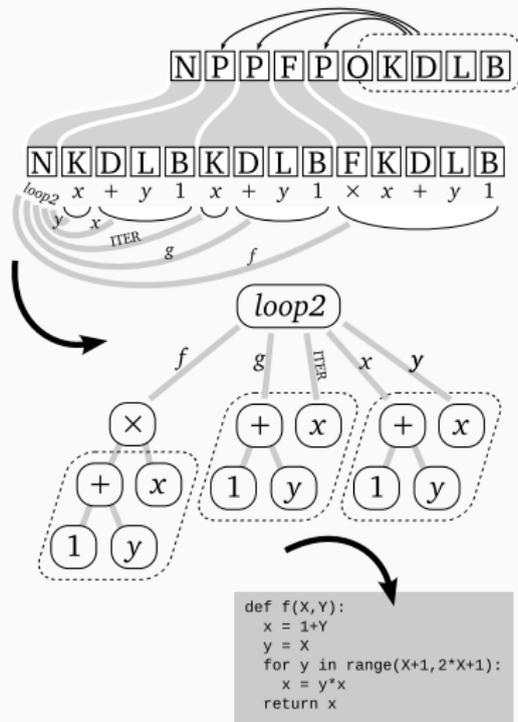

Introducing Global Macros/Definitions

A macro/expanded version of A14187 (cubes of palindromes).

0, 1, 8, 27, 64, 125, 216, 343, 512, 729, 1331, 10648, 35937, 85184,

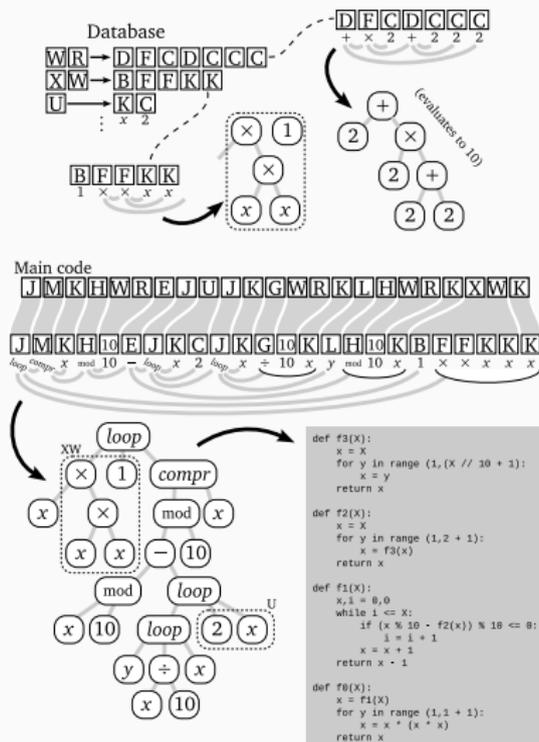

Five Different Self-Learning Runs

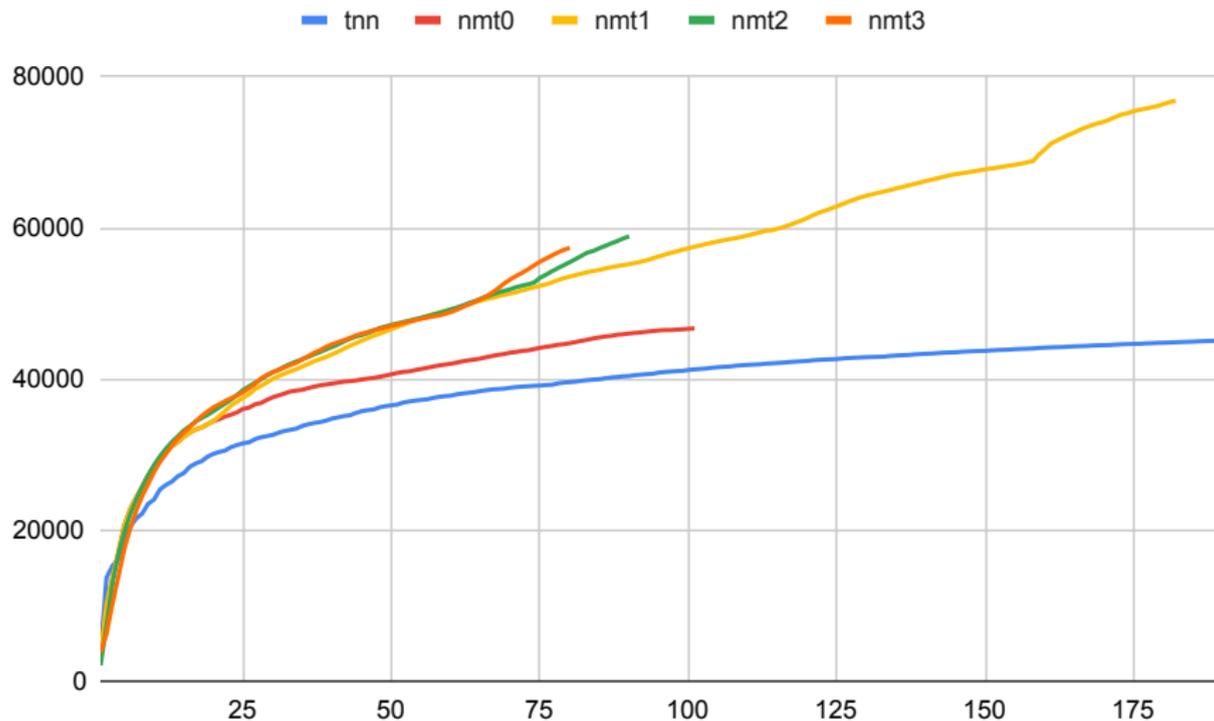


Figure: Cumulative counts of solutions.

Five Different Self-Learning Runs

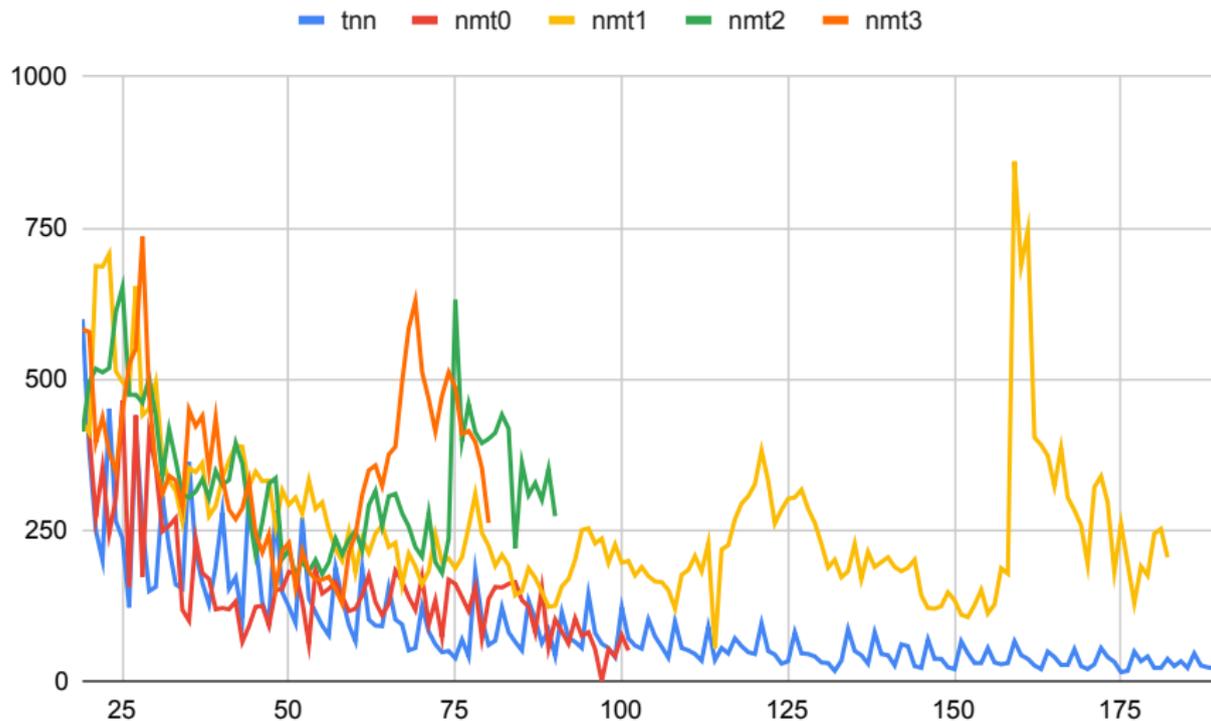


Figure: Increments of solutions.

Size Evolution

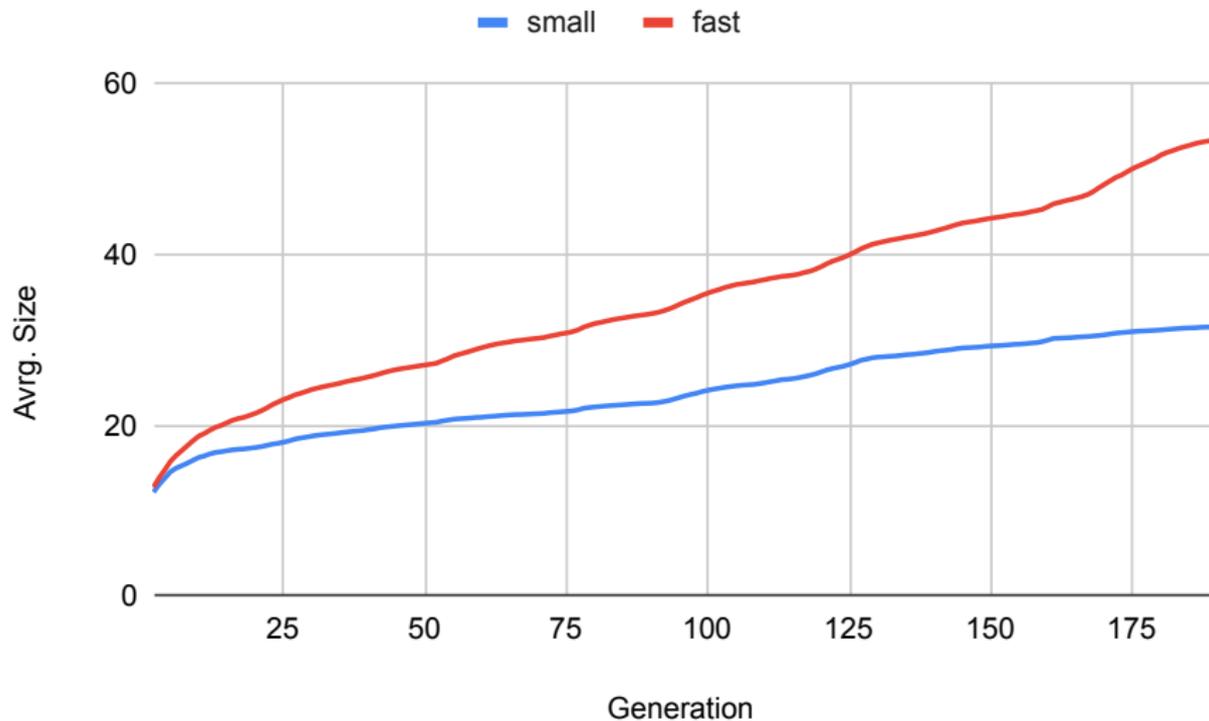


Figure: Avrg. size in iterations

Speed Evolution

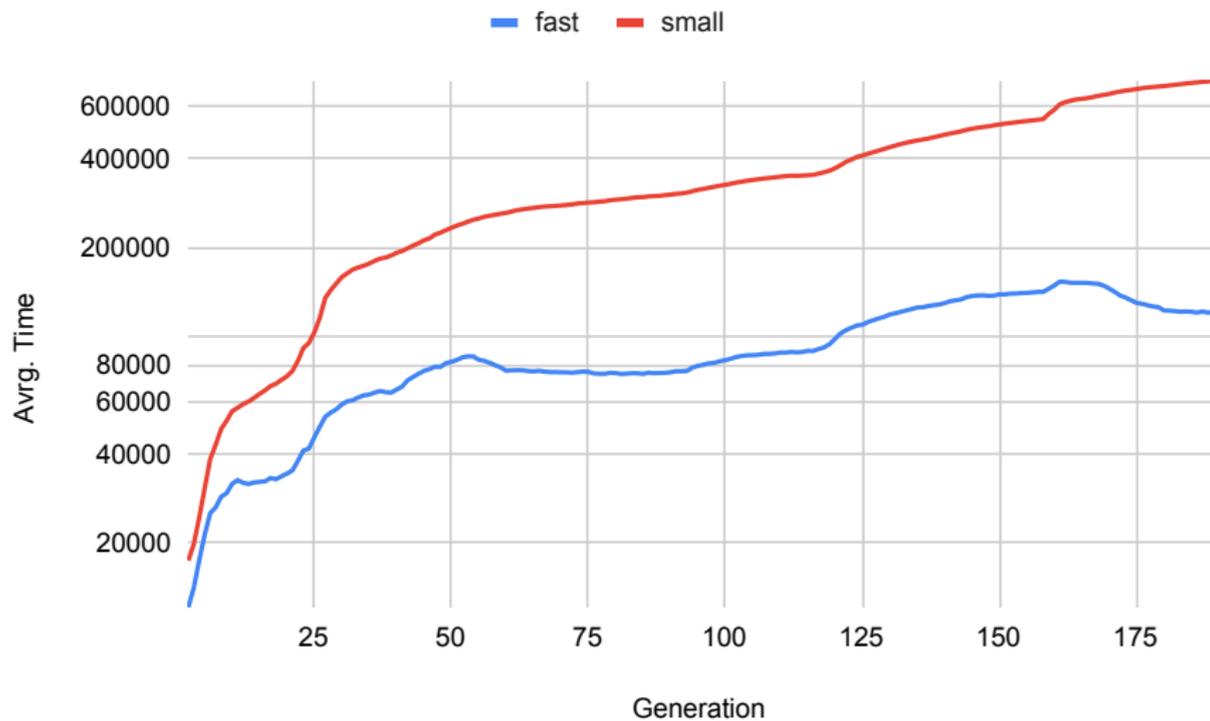


Figure: Avg. time in iterations

Generalization of the Solutions to Larger Indices

- Are the programs correct?
- OEIS provides additional terms for some of the OEIS entries
- Among 78118 solutions, 40,577 of them have a b-file with 100 terms
- We evaluate both the small and the fast programs on them
- Here, 14,701 small and 11,056 fast programs time out.
- 90.57% of the remaining slow programs check
- 77.51% for the fast programs
- A common error is reliance on an approximation for a real number, such as π .

Are two QSynt programs equivalent?

- As with primes, we often find **many programs** for one OEIS sequence
- Currently we have almost 2M programs for the 100k sequences
- It may be quite hard to see that the programs **are equivalent**
- A simple example for 0, 2, 4, 6, 8, ... with two programs f and g :
 - $f(0) = 0, f(n) = 2 + f(n - 1)$ if $n > 0$
 - $g(n) = 2 * n$
 - conjecture: $\forall n \in \mathbb{N}. g(n) = f(n)$
- We can ask mathematicians, but we have **thousands of such problems**
- Or we can try to **ask our ATPs** (and thus create a large ATP benchmark)!
- Here is one SMT encoding by Mikolas Janota:

```
(set-logic UFLIA)
(define-fun-rec f ((x Int)) Int (ite (<= x 0) 0 (+ 2 (f (- x 1)))))
(assert (exists ((c Int)) (and (> c 0) (not (= (f c) (* 2 c))))))
(check-sat)
```

Inductive proof by Vampire of the $f = g$ equivalence

```
% SZS output start Proof for rec2
1. f(X0) = $ite($lesseq(X0,0), 0,$sum(2,f($difference(X0,1)))) [input]
2. ? [X0 : $int] : ($greater(X0,0) & ~f(X0) = $product(2,X0)) [input]
[...]
43. ~$less(0,X0) | iG0(X0) = $sum(2,iG0($sum(X0,-1))) [evaluation 40]
44. (! [X0 : $int] : (($product(2,X0) = iG0(X0) & ~$less(X0,0)) => $product(2,$sum(X0,1)) = iG0($sum(X0,1)))
    & $product(2,0) = iG0(0)) => ! [X1 : $int] : ($less(0,X1) => $product(2,X1) = iG0(X1)) [induction hypo]
[...]
49. $product(2,0) != iG0(0) | $product(2,$sum(sK3,1)) != iG0($sum(sK3,1)) | ~$less(0,sK1) [resolution 48,41]
50. $product(2,0) != iG0(0) | $product(2,sK3) = iG0(sK3) | ~$less(0,sK1) [resolution 47,41]
51. $product(2,0) != iG0(0) | ~$less(sK3,0) | ~$less(0,sK1) [resolution 46,41]
52. 0 != iG0(0) | $product(2,$sum(sK3,1)) != iG0($sum(sK3,1)) | ~$less(0,sK1) [evaluation 49]
53. 0 != iG0(0) | $product(2,sK3) = iG0(sK3) | ~$less(0,sK1) [evaluation 50]
54. 0 != iG0(0) | ~$less(sK3,0) | ~$less(0,sK1) [evaluation 51]
55. 0 != iG0(0) | ~$less(sK3,0) [subsumption resolution 54,39]
57. 1 <=> $less(sK3,0) [avatar definition]
59. ~$less(sK3,0) <- (~1) [avatar component clause 57]
61. 2 <=> 0 = iG0(0) [avatar definition]
64. ~1 | ~2 [avatar split clause 55,61,57]
65. 0 != iG0(0) | $product(2,sK3) = iG0(sK3) [subsumption resolution 53,39]
67. 3 <=> $product(2,sK3) = iG0(sK3) [avatar definition]
69. $product(2,sK3) = iG0(sK3) <- (3) [avatar component clause 67]
70. 3 | ~2 [avatar split clause 65,61,67]
71. 0 != iG0(0) | $product(2,$sum(sK3,1)) != iG0($sum(sK3,1)) [subsumption resolution 52,39]
72. $product(2,$sum(1,sK3)) != iG0($sum(1,sK3)) | 0 != iG0(0) [forward demodulation 71,5]
74. 4 <=> $product(2,$sum(1,sK3)) = iG0($sum(1,sK3)) [avatar definition]
76. $product(2,$sum(1,sK3)) != iG0($sum(1,sK3)) <- (~4) [avatar component clause 74]
77. ~2 | ~4 [avatar split clause 72,74,61]
82. 0 = iG0(0) [resolution 36,10]
85. 2 [avatar split clause 82,61]
246. iG0($sum(X1,1)) = $sum(2,iG0($sum($sum(X1,1),-1))) | $less(X1,0) [resolution 43,14]
251. $less(X1,0) | iG0($sum(X1,1)) = $sum(2,iG0(X1)) [evaluation 246]
[...]
1176. $false <- (~1, 3, ~4) [subsumption resolution 1175,1052]
1177. 1 | ~3 | 4 [avatar contradiction clause 1176]
1178. $false [avatar sat refutation 64,70,77,85,1177]
% SZS output end Proof for rec2
% Time elapsed: 0.016 s
```

80 Programs That Have Most Evolved

120	https://oeis.org/A238952	101	https://oeis.org/A97012	98	https://oeis.org/A17666
117	https://oeis.org/A35218	101	https://oeis.org/A71190	98	https://oeis.org/A113184
116	https://oeis.org/A1001	101	https://oeis.org/A70824	97	https://oeis.org/A82
112	https://oeis.org/A35178	101	https://oeis.org/A64987	97	https://oeis.org/A6579
111	https://oeis.org/A88580	101	https://oeis.org/A57660	97	https://oeis.org/A56595
111	https://oeis.org/A62069	101	https://oeis.org/A54024	97	https://oeis.org/A293228
111	https://oeis.org/A163109	101	https://oeis.org/A53222	97	https://oeis.org/A27847
111	https://oeis.org/A1615	101	https://oeis.org/A50457	97	https://oeis.org/A23645
109	https://oeis.org/A66446	101	https://oeis.org/A23888	97	https://oeis.org/A10
108	https://oeis.org/A48250	101	https://oeis.org/A209295	96	https://oeis.org/A92403
108	https://oeis.org/A321516	101	https://oeis.org/A206787	96	https://oeis.org/A90395
108	https://oeis.org/A2654	100	https://oeis.org/A99184	96	https://oeis.org/A83919
107	https://oeis.org/A75653	100	https://oeis.org/A63659	96	https://oeis.org/A7862
107	https://oeis.org/A60278	100	https://oeis.org/A62968	96	https://oeis.org/A78306
107	https://oeis.org/A23890	100	https://oeis.org/A35154	96	https://oeis.org/A69930
106	https://oeis.org/A62011	100	https://oeis.org/A339965	96	https://oeis.org/A69192
106	https://oeis.org/A346613	100	https://oeis.org/A277791	96	https://oeis.org/A54519
106	https://oeis.org/A344465	100	https://oeis.org/A230593	96	https://oeis.org/A53158
105	https://oeis.org/A49820	100	https://oeis.org/A182627	96	https://oeis.org/A351267
104	https://oeis.org/A55155	99	https://oeis.org/A9191	96	https://oeis.org/A334136
104	https://oeis.org/A349215	99	https://oeis.org/A82051	96	https://oeis.org/A33272
104	https://oeis.org/A143348	99	https://oeis.org/A62354	96	https://oeis.org/A325939
103	https://oeis.org/A92517	99	https://oeis.org/A247146	96	https://oeis.org/A211779
103	https://oeis.org/A64840	99	https://oeis.org/A211261	96	https://oeis.org/A186099
102	https://oeis.org/A9194	99	https://oeis.org/A147588	96	https://oeis.org/A143152
102	https://oeis.org/A51953	98	https://oeis.org/A318446	96	https://oeis.org/A125168
102	https://oeis.org/A155085	98	https://oeis.org/A203		

Evolution and Proliferation of Primes and Others

<https://bit.ly/3XHZsjK>: triangle coding, sigma (sum of divisors), primes. <https://bit.ly/3iJ4oGd> (the first 24, now 50)

Nr	Program
P1	<code>(if x <= 0 then 2 else 1) + (compr (((loop (x + x) (x mod 2) (loop (x * x) 1 (loop (x + x) (x div 2) 1)))) + x) mod (1 + x)) x</code>
P2	<code>1 + (compr (((loop (x * x) 1 (loop (x + x) (x div 2) 1)) + x) * x) mod (1 + x)) (1 + x)</code>
P3	<code>1 + (compr (((loop (x * x) 1 (loop (x + x) (x div 2) 1)) + x) mod (1 + x)) (1 + x))</code>
P4	<code>2 + (compr ((loop2 (1 + (if (x mod (1 + y)) <= 0 then 0 else x)) (y - 1) x 1 x) mod (1 + x)) x)</code>
P5	<code>1 + (compr ((loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) x (1 + x)) mod (1 + x)) (1 + x))</code>
P6	<code>1 + (compr ((loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) (2 + (x div (2 + (2 + 2)))) (1 + x)) mod (1 + x)) (1 + x))</code>
P7	<code>compr ((1 + (loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) x x)) mod (1 + x)) (2 + x)</code>
P8	<code>1 + (compr ((loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) (1 + ((2 + x) div (2 + (2 + 2)))) (1 + x)) mod (1 + x)) (1 + x))</code>
P9	<code>compr (x - (loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) x x)) (2 + x)</code>
P10	<code>compr (x - (loop (if (x mod (1 + y)) <= 0 then 2 else x) (x div 2) x)) (2 + x)</code>
P11	<code>1 + (compr ((loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) (1 + (x div (2 + (2 + 2)))) (1 + x)) mod (1 + x)) (1 + x))</code>
P12	<code>compr ((x - (loop (if (x mod (1 + y)) <= 0 then y else x) x x)) - 2) (2 + x)</code>
P13	<code>1 + (compr ((loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) (2 + (x div (2 * (2 + (2 + 2)))) (1 + x)) mod (1 + x)) (1 + x))</code>
P14	<code>compr ((x - (loop (if (x mod (1 + y)) <= 0 then y else x) x x)) - 1) (2 + x)</code>
P15	<code>1 + (compr (x - (loop (if (x mod (1 + y)) <= 0 then (1 + y) else x) (2 + (x div (2 * (2 + (2 + 2)))) (1 + x)) (1 + x))</code>
P16	<code>compr (2 - (loop (if (x mod (1 + y)) <= 0 then 0 else x) (x - 2) x)) x</code>
P17	<code>1 + (compr (x - (loop (if (x mod (1 + y)) <= 0 then 2 else x) (2 + (x div (2 * (2 + (2 + 2)))) (1 + x)) (1 + x))</code>
P18	<code>1 + (compr (x - (loop (if (x mod (1 + y)) <= 0 then 2 else x) (1 + (2 + (x div (2 * (2 * (2 + 2)))) (1 + x)) (1 + x))</code>
P19	<code>1 + (compr (x - (loop2 (loop (if (x mod (1 + y)) <= 0 then 2 else x) (2 + (y div (2 * (2 + (2 + 2)))) (1 + y)) 0 (1 - (x mod 2) 1 x)) (1 + x))</code>
P20	<code>1 + (compr (x - (loop2 (loop (if (x mod (1 + y)) <= 0 then 2 else x) (1 + (2 + (y div (2 * (2 * (2 + 2)))) (1 + y)) 0 (1 - (x mod 2) 1 x)) (1 + x))</code>
P21	<code>1 + (compr (x - (loop2 (loop (if (x mod (2 + y)) <= 0 then 2 else x) (2 + (y div (2 * ((2 + 2) + (2 + 2)))) (1 + y)) 0 (1 - (x mod 2) 1 x)) (1 + x))</code>
P22	<code>1 + (compr (x - (loop2 (loop (if (x mod (2 + y)) <= 0 then 2 else x) (2 + (y div (2 * (2 * (2 + 2)))) (1 + y)) 0 (1 - (x mod 2) 1 x)) (1 + x))</code>
P23	<code>2 + (compr (loop (x - (if (x mod (1 + y)) <= 0 then 0 else 1)) x x) x)</code>
P24	<code>loop (1 + x) (1 - x) (1 + (2 * (compr (x - (loop (if (x mod (2 + y)) <= 0 then 1 else x) (2 + (x div (2 * (2 + 2)))) (1 + (x + x)))) x))</code>

Evolution and Proliferation of Primes

Iter	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
26	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
27	7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
28	8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
29	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
30	10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
31	4	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
32	6	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
33	8	1	6	6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
34	12	4	6	6	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
35	7	12	6	0	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
36	4	10	6	0	17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
37	3	4	6	0	18	6	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
38	2	3	1	0	12	18	11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
39	2	3	1	0	9	56	31	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
40	2	5	2	0	7	59	49	9	1	0	2	0	1	0	0	0	0	0	0	0	0	0	0	0
41	1	2	3	0	4	52	58	42	23	0	13	0	8	0	0	0	0	0	0	0	0	0	0	0
42	0	2	4	0	3	44	50	38	60	8	11	0	55	0	0	0	0	0	0	0	0	0	0	0
43	0	2	12	0	0	37	55	14	116	35	16	7	90	0	0	0	0	0	0	0	0	0	0	0
44	0	2	13	0	0	28	40	6	176	73	19	8	122	9	12	0	0	0	0	0	0	0	0	0
45	0	2	9	0	0	19	24	4	147	185	26	16	94	25	29	0	7	0	0	0	0	0	0	0
46	0	2	4	0	0	11	14	0	101	256	21	14	66	64	30	0	29	0	0	0	0	0	0	0
47	0	0	0	0	0	9	4	0	55	290	23	3	43	116	16	6	62	14	0	0	0	0	0	0
48	0	0	0	0	0	8	0	0	22	261	16	0	34	192	10	6	89	30	0	0	0	0	0	0
49	0	0	0	0	0	8	0	0	6	195	11	0	36	225	8	6	99	34	0	0	0	0	0	0
50	0	0	0	0	0	5	0	0	2	154	8	0	29	168	6	6	108	39	0	0	0	0	0	0
51	0	0	0	0	0	4	0	0	0	121	7	0	21	97	6	6	113	43	0	0	0	0	0	0
52	0	0	0	0	0	2	0	0	0	118	8	0	12	62	6	6	110	51	0	0	0	0	0	0
53	0	0	0	0	0	1	0	0	0	59	7	0	15	33	6	6	125	62	0	0	0	0	0	0
54	0	0	0	0	0	1	0	0	0	41	4	0	16	17	6	9	137	72	0	0	0	0	0	0
55	0	0	0	0	0	2	0	0	0	32	4	0	15	9	6	17	147	82	0	0	0	0	0	0
56	0	0	0	0	0	1	0	0	0	29	4	0	10	7	6	39	152	98	0	0	0	0	0	0

Evolution and Proliferation of Primes

Iter	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
57	0	0	0	0	0	1	0	0	1	28	3	0	9	5	6	103	142	108	0	0	0	0	0	0
58	0	0	0	0	0	0	0	0	1	17	3	0	7	4	6	146	146	120	0	0	0	0	0	0
59	0	0	0	0	0	0	0	0	1	11	3	0	6	2	0	179	153	122	0	0	0	0	0	0
60	0	0	0	0	0	0	0	0	1	6	3	0	3	2	0	206	148	121	0	0	0	0	0	0
61	0	0	0	0	0	0	0	0	0	6	3	0	3	1	0	220	139	138	0	0	0	0	0	0
62	0	0	0	0	0	0	0	0	0	5	3	0	2	0	0	245	118	145	0	0	0	0	0	0
63	0	0	0	0	0	0	0	0	0	5	3	0	2	0	0	263	103	160	0	0	0	0	0	0
64	0	0	3	0	0	0	0	0	0	6	4	0	2	0	0	284	87	162	0	0	0	0	0	0
65	0	0	13	0	0	0	0	0	0	5	4	0	1	0	0	303	74	173	0	0	0	0	0	0
66	0	0	34	0	0	0	0	0	0	3	2	0	1	0	0	315	67	174	0	0	0	0	0	0
67	0	0	53	0	0	0	0	0	0	1	1	0	1	0	0	321	64	180	0	0	0	0	0	0
68	0	0	61	0	0	0	0	0	0	1	1	0	1	0	0	323	66	178	0	0	0	0	0	0
69	0	0	67	0	0	0	0	0	0	1	1	0	1	0	0	325	63	178	0	0	0	0	0	0
70	0	0	70	0	0	0	0	0	0	1	1	0	1	0	0	324	60	182	0	0	0	0	0	0
71	0	0	72	0	0	0	0	0	0	1	1	0	1	0	0	330	56	181	0	0	0	0	0	0
72	0	0	73	0	0	0	0	0	0	0	2	0	1	0	0	332	57	190	0	0	0	0	0	0
73	0	0	72	0	0	0	0	0	0	0	2	0	1	0	0	330	58	191	0	0	0	0	0	0
74	0	0	71	0	0	0	0	0	0	0	3	0	1	0	0	336	56	189	0	0	0	0	0	0
75	0	0	74	0	0	0	0	0	0	0	2	0	1	0	0	340	55	192	0	0	0	0	0	0
76	0	0	77	0	0	0	0	0	0	0	1	0	0	0	0	341	57	195	0	0	0	0	0	0
77	0	0	79	0	0	0	0	0	0	0	1	0	0	0	0	343	56	191	0	0	0	0	0	0
78	0	0	79	0	0	0	0	0	0	0	1	0	0	0	0	344	57	201	0	0	0	0	0	0
79	0	0	81	0	0	0	0	0	0	0	0	0	0	0	0	344	56	200	0	0	0	0	0	0
80	0	0	80	0	0	0	0	0	0	0	0	0	0	0	0	346	55	210	0	0	0	0	0	0
81	0	0	75	0	0	0	0	0	0	0	0	0	0	0	0	351	55	206	0	0	0	0	0	0
82	0	0	77	0	0	0	0	0	0	0	0	0	0	0	0	354	53	206	0	0	0	0	0	0
83	0	0	77	0	0	0	0	0	0	1	0	0	0	0	0	360	53	207	0	0	0	0	0	0
84	0	0	76	0	0	0	0	0	0	1	0	0	0	0	0	360	53	208	0	0	0	0	0	0
85	0	0	74	0	0	0	0	0	0	1	0	0	0	0	0	363	53	207	0	0	0	0	0	0
86	0	0	75	0	0	0	0	0	0	0	0	0	0	0	0	361	54	205	0	0	0	0	0	0
87	0	0	77	0	0	0	0	0	0	0	0	0	0	0	0	359	54	198	0	0	0	0	0	0
88	0	0	80	0	0	0	0	0	0	1	0	0	0	0	0	359	54	199	0	0	0	0	0	0
89	0	0	83	0	0	0	0	0	0	1	0	0	0	0	0	357	56	196	0	0	0	0	0	0

Evolution and Proliferation of Primes

Iter	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
90	0	0	82	0	0	0	0	0	0	1	0	0	0	0	0	345	56	194	0	0	0	0	0	0
91	0	0	81	0	0	0	0	0	0	1	0	0	0	0	0	331	50	188	0	0	0	0	0	0
92	0	0	66	0	0	0	0	0	0	0	0	0	0	0	0	322	31	176	9	1	0	0	0	0
93	0	0	56	0	0	0	0	0	0	0	0	0	0	0	0	313	18	162	37	17	0	0	0	0
94	0	0	41	0	0	0	0	0	0	0	0	0	0	0	0	303	9	145	52	30	0	0	0	0
95	0	0	26	0	0	0	0	0	0	0	0	0	0	0	0	300	8	130	54	38	0	0	0	0
96	0	0	22	0	0	0	0	0	0	1	0	0	0	0	0	293	5	119	64	47	1	0	0	0
97	0	0	17	0	0	0	0	0	0	0	0	0	0	0	0	285	4	100	78	56	2	0	0	0
98	0	0	16	0	0	0	0	0	0	0	0	0	0	0	0	276	3	88	79	64	10	0	0	0
99	0	0	12	0	0	0	0	0	0	0	0	0	0	0	0	269	0	78	56	56	85	0	0	0
100	0	0	10	0	0	0	0	0	0	0	0	0	0	0	0	266	0	73	40	51	116	0	0	0
101	0	0	8	0	0	0	0	0	0	0	0	0	0	0	0	266	1	63	33	55	49	0	0	0
102	0	0	7	0	0	0	0	0	0	0	0	0	0	0	0	259	0	56	23	64	25	0	0	0
103	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	256	2	50	21	56	29	0	0	0
104	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	258	1	49	20	49	29	0	0	0
105	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	255	1	47	18	43	27	0	0	0
106	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	253	1	44	14	37	15	0	0	0
107	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	252	1	40	12	36	11	0	0	0
108	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0	255	2	38	12	34	8	0	0	0
109	0	0	4	0	0	0	0	0	0	0	0	0	0	0	0	255	3	34	11	33	8	0	0	0
110	0	0	4	0	0	0	0	0	0	0	0	0	0	0	0	256	2	35	10	30	8	0	0	0
111	0	0	4	0	0	0	0	0	0	0	0	0	0	0	0	258	2	32	10	31	7	0	0	0
112	0	0	4	0	0	0	0	0	0	0	0	0	0	0	0	262	2	31	11	31	7	0	0	0
113	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	263	0	31	10	29	1	0	0	0
114	0	0	2	0	0	0	0	0	0	0	0	0	0	0	0	263	0	31	7	30	1	0	0	0
115	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	261	0	30	5	28	1	0	0	0
116	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	263	0	27	6	29	1	0	0	0
117	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	263	0	28	4	27	1	0	0	0
118	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	266	1	28	3	25	1	0	0	0
119	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	264	1	28	3	24	1	0	0	0
120	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	261	1	29	3	21	1	0	0	0
121	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	268	1	28	2	20	1	0	0	0
122	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	274	1	28	3	20	1	2	0	0

Evolution and Proliferation of Primes

Iter	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
123	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	276	1	28	2	19	1	9	0	0
124	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	277	1	27	2	19	0	29	0	0
125	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	279	1	26	2	18	0	48	0	0
126	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	277	1	24	2	15	0	61	0	0
127	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	274	1	24	2	13	0	73	0	0
128	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	275	0	24	2	13	0	79	0	0
129	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	282	0	24	1	12	0	92	1	0
130	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	278	0	24	1	12	0	103	5	0
131	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	275	0	24	0	11	0	109	17	0
132	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	261	0	24	0	11	0	112	37	0
133	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	225	0	22	0	10	0	113	110	0
134	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	182	0	22	0	10	0	114	176	0
135	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	159	0	22	0	10	0	114	209	0
136	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	127	0	22	0	7	0	112	247	0
137	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	105	0	23	0	6	0	109	287	2
138	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	96	0	23	0	6	0	111	299	14
139	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	89	0	23	0	6	0	117	310	45
140	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	80	0	22	0	4	0	115	319	51
141	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	67	0	23	0	4	0	118	335	36
142	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	65	0	23	0	3	0	118	342	19
143	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	55	0	22	0	3	0	116	352	6
144	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	52	0	22	0	3	0	109	359	2
145	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	51	0	23	0	3	0	101	363	2
146	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	50	0	24	0	3	0	93	364	7
147	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	50	0	27	0	3	0	93	369	7
148	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	45	0	26	0	3	0	97	378	8

Selection of 123 Solved Sequences

<https://github.com/Anon52MI4/oeis-alien>

Table: Samples of the solved sequences.

https://oeis.org/A317485	Number of Hamiltonian paths in the n -Bruhat graph.
https://oeis.org/A349073	$a(n) = U(2*n, n)$, where $U(n, x)$ is the Chebyshev polynomial of the second kind.
https://oeis.org/A293339	Greatest integer k such that $k/2^n < 1/e$.
https://oeis.org/A1848	Crystal ball sequence for 6-dimensional cubic lattice.
https://oeis.org/A8628	Molien series for A_5 .
https://oeis.org/A259445	Multiplicative with $a(n) = n$ if n is odd and $a(2^s) = 2$.
https://oeis.org/A314106	Coordination sequence Gal.6.199.4 where G.u.t.v denotes the coordination sequence for a vertex of type v in tiling number t in the Galebach list of u -uniform tilings
https://oeis.org/A311889	Coordination sequence Gal.6.129.2 where G.u.t.v denotes the coordination sequence for a vertex of type v in tiling number t in the Galebach list of u -uniform tilings.
https://oeis.org/A315334	Coordination sequence Gal.6.623.2 where G.u.t.v denotes the coordination sequence for a vertex of type v in tiling number t in the Galebach list of u -uniform tilings.
https://oeis.org/A315742	Coordination sequence Gal.5.302.5 where G.u.t.v denotes the coordination sequence for a vertex of type v in tiling number t in the Galebach list of u -uniform tilings.
https://oeis.org/A004165	OEIS writing backward
https://oeis.org/A83186	Sum of first n primes whose indices are primes.
https://oeis.org/A88176	Primes such that the previous two primes are a twin prime pair.
https://oeis.org/A96282	Sums of successive twin primes of order 2.
https://oeis.org/A53176	Primes p such that $2p + 1$ is composite.
https://oeis.org/A267262	Total number of OFF (white) cells after n iterations of the "Rule 111" elementary cellular automaton starting with a single ON (black) cell.

More topics if time remains

- Guided search vs direct synthesis - the example of infinitude of primes ($n! + 1$)
- Triangle coding and introducing a new virus into our population
- Memorization, targeted vs untargeted invention
- Finding programs by training useful transformations

Thanks and Advertisement

- Thanks for your attention!
- **AITP – Artificial Intelligence and Theorem Proving**
- September 3–8, 2023, Aussois, France, aitp-conference.org
- ATP/ITP/Math vs AI/Machine-Learning people, Computational linguists
- Discussion-oriented and experimental
- Grown to 80 people in 2019
- Invited talks by people who do AI/ML/TP for math, physics, ...